
Accessories temperature control



This system consists of a temperature sensor (ILLZTT5069K) and a control unit (12V or 24V available). The fan speed varies according to the actual oil temperature on the sensor. This reduces the noise level of the cooler system and increases the durability of the fan motor, because it is not running on the maximum speed all the time. The start up temperature of this system is 44°C and the maximum rotation of the fan is applied when the oil temperature reaches 55°C. The electro-magnetic compatibility (EMC) is tested according to CE (89/336/EC) and E (95/54/EC). Moreover the control unit (ILLZTC12-2K and ILLZTC24-2K) can also be connected with our temperature switches (IP69K switch type). This is a simple on/off mode, according to the switch temperature. The control unit benefit is the soft start curve, extending the life time of the fan motor.

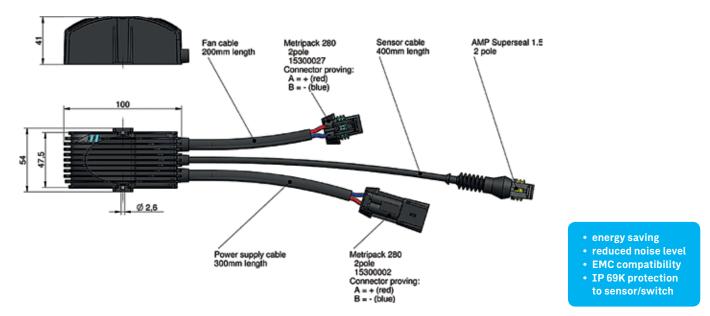

Technical Data

order number	description	max. power fan motor	max. current fan	protection	weight	supply
		[W]	[A]		[kg]	DC
ILLZTC12-2K	temperature control 12V DC	310	21 (14,7V DC)	IP 67	0,25	12V (9V - 15V)
ILLZTC24-2K	temperature control 24V DC	340	12 (24V DC)	IP 67	0,25	24V (18V - 32V)

Characteristics

material:	polyamide	
mounting instructions	any mounting position	

Measurement input

temperature sensor	ILLZTT5069K (control range 44-55°C) page 38
temperature switch	ILLZTH5069K (set point 50°C, soft start) page 39
	ILLZTH6069K (set point 60°C, soft start) page 39
	ILLZTH9069K (set point 90°C, soft start) page 39



Ambient Conditions

i	ambient temperature range	-20°C to +85°C
	storage temperature range	-60°C to +110°C

Combinations

12V and 24V DC coolers LL 03L, LL 04, LL 06, LL08 / TT 05 – 25 rail / ASA 0177 – 0367

Please note:

The maximum start current is approximately 10% higher than the nominal current of the motor. Observe the maximum allowable supply of the fan motor. The allowed voltage range of the fan might differ from the allowed voltage range of the temperature control. In case of inverse polarity of the supply, the control unit is deactivated. After changing the polarity, the control is ready for use again. If the supply voltage exceeds 16,5V (ILLZTC12-2K) and 32V (ILLZTC24-2K) respectively, the control is switched off to protect the fan. After supply voltage is reducing below 12V or 24V, respectively, the control is activated again, automatically. The closed current is 5mA (ILLZTC12-2K) and 4mA (ILLZTC24-2K), respectively. The recommended fuse is fast acting 25A (ILLZTC12-2K) and 16A (ILLZTC24-2K), respectively. Due to the high currents (21A at the ILLZTC12-2K), the dimension of the electrical wires must be appropriate and in case of a luster terminal it has to be tightened properly.

This data sheet and the corresponding scale drawings are to be used as a general guideline and technical overview of our products. Please contact us if more exact information is needed. As we are constantly improving our products, their characteristics, dimensions and weights may also change, although we do our best to incorporate these changes continually. asa assumes no liability for any information therein, any errors, omissions, missions, missions,