


Oil / Air Cooler TT 16 GT

12 / 24V DC with protection housing and temperature control

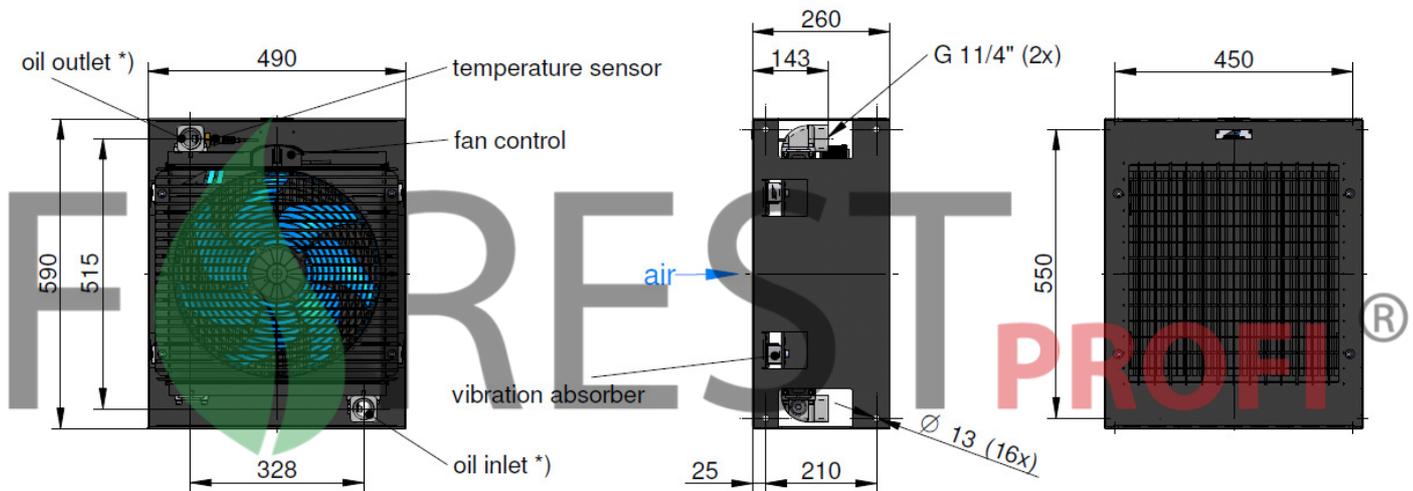


¹⁾... oil flow is only fixed at bypass coolers


Technical Data

description	order number	motor power	protection level	current	noise level	weight
		[kW]		[A]	[dB(A)]	[kg]
TT 16 12V DC GT	ASATT16GD01GT	0,26	IP 67	18,6	79	30,5
TT 16 24V DC GT	ASATT16GD02GT	0,28	IP 67	10,4	79	30,5
TT 16 12V DC GT with bypass	ASATT16GD01BPGT	0,26	IP 67	18,6	79	31,0
TT 16 24V DC GT with bypass	ASATT16GD02BPGT	0,28	IP 67	10,4	79	31,0

specific cooling performance

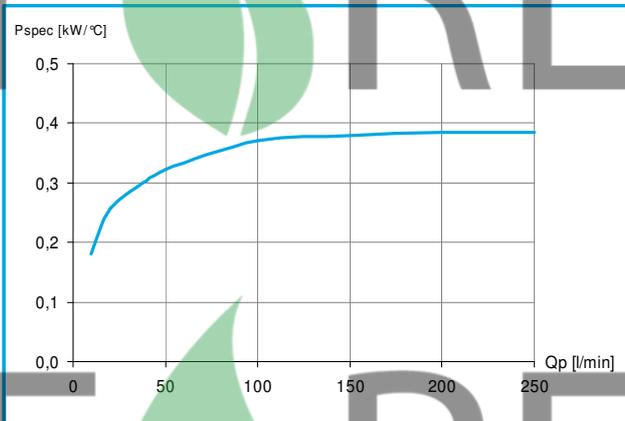

pressure drop at 30cst

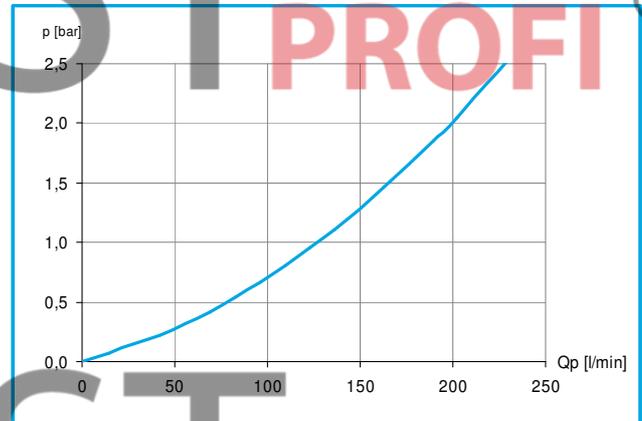

radiator

material:	aluminium
air fin shape:	wavy
working pressure:	26 bar

options

asa universal connectors	BSP 1 1/4 ^(**)
--------------------------	---------------------------

^{*}) Please contact us for further options and assistance

Please read manual before installation!